



9804/3857




INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

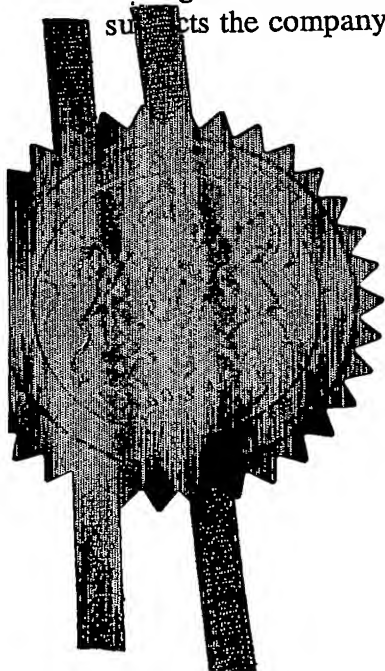


Signed

Dated

31 December 2004

Best Available Copy

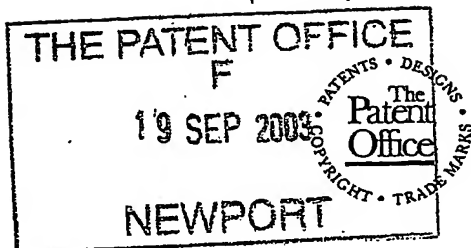

19SEP03 E838434-1 000354
P01/7700 0.00-0321916.9

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

NSP/LJH/P089481GB

2. Patent application number

(The Patent Office will fill this part in)

0321916.9

19 SEP 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

HeatSafe Cable Systems Ltd
Cromwell Road
Bredbury, Stockport
Cheshire SK6 2RF

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

8717068001

4. Title of the invention

SELF-REGULATING ELECTRICAL HEATING
CABLE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk
Sussex House
83-85 Mosley Street
Manchester M2 3LG

18004 ✓

Patents ADP number (if you know it)

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note d)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Points Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description	8
Claim(s)	2
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (Patents Form 7/77)

1

Request for a preliminary examination
and search (Patents Form 9/77)Request for a substantive examination
(Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Marks & Clerk

Marks & Clerk

Date 18/09/2003

12. Name, daytime telephone number and

e-mail address, if any, of person to contact in the United Kingdom

Neil Parkinson 0161 233 5829

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
 - b) Write your answers in capital letters using black ink or you may type them.
 - c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
 - d) If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
 - e) Once you have filled in the form you must remember to sign and date it.
- f) Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

SELF-REGULATING ELECTRICAL HEATING CABLE

The present invention relates to an electrical heating cable, the power output of which is self-regulating as the result of the incorporation of a material with a positive temperature coefficient (PTC), as well as heating devices incorporating such cables.

Parallel resistance semi-conductive, self-regulating heating cables are well known. Such cables normally comprise two conductors (known as buswires) extending longitudinally along the cable. Typically, the conductors are imbedded within a semi-conductive polymeric heating element, the element being extruded continuously along the length of the conductors. The cable thus has a parallel resistance form, with power being applied via the two conductors to the heating element connected in parallel across the two conductors. The heating element usually has a positive temperature coefficient. Thus as the temperature of the element increases, the resistance of the material electrically connected between the conductors increases, thereby reducing power output. Such heating cables, in which the power output varies according to temperature, are said to be self-regulating or self-limiting.

Figure 1 illustrates a typical parallel resistance, semi-conductive, self-regulating heating cable 2. The cable consists of a semi-conductive polymeric matrix 8 extruded around the two parallel conductors 4, 6. The matrix serves as the heating element. A polymeric insulator jacket 10 is then extruded over the matrix 8. Typically, a conductive outer braid 12 (e.g. a tinned copper braid) is added for additional mechanical protection and/or use as an earth wire. Such a braid is typically covered by a thermo plastic overjacket 14 for additional mechanical and corrosive protection.

Such parallel resistance self-regulating heating cables possess a number of advantages over non self-regulating heating cables, and are thus relatively popular. For instance, self-regulating heating cables do not usually overheat or burn out due to their PTC characteristics. As the temperature at any particular point in the cable increases, the resistance of the heating element at that point increases, reducing the power output at that point, such that the heater is effectively switched off.

Further, due to this self-regulation of heating element temperature, it is often unnecessary to utilise "cold leads" with such heaters. Cold leads are often required in non-regulated heaters, as in a high temperature environment, the heating element may reach relatively high temperatures. Cold leads are connected to the ends of such non-regulated heaters to enable the heating element to be connected to the electrical supply without, for example, overheating the terminals or the supply. Cold leads typically take the form of relatively low resistance wires arranged to produce no appreciable heat. However, the fixing of the cold leads often involves costly labour. Further, the connection between the cold lead and the heater has a relatively high failure rate, due to the temperature gradient and thermal cycling experienced by the connection.

Consequently, as self-regulating heaters are typically arranged to operate within a safe temperature range, cold leads are not required.

However, parallel resistance semi-conductive self-regulating heaters do possess a number of undesirable characteristics.

The most common failure mode of parallel resistance self-regulating heaters is loss of, or reduction in, electrical contact between the power conductors and the extruded semi-conductive matrix forming the heating element. For example, differential expansion of the components and thermal cycling may lead to such failure or reduction in electrical contact. Such a reduction leads to electrical arcing within the cable, and a consequent loss in thermal output. The operational life of the product is thus dependant upon the bond between the conductors and the heating element.

Often the heating cable will be at a relatively low temperature (and hence low resistance) when initially energised. The low resistance will thus draw a high start up current when the cable is energised from cold. Consequently, circuit breakers intended to provide a first level of electrical safety (over current protection) must be sized to allow much higher currents (often by a factor of 6) than the normal run or operating current. This results in a lowering of circuit safety and over-sized switch gear and components.

It is an object of the present invention to provide an electric heating cable that substantially obviates or mitigates one or more of the problems of the prior art, whether referred to herein or otherwise.

According to a first aspect, the present invention provides a series resistance heating cable comprising a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.

By providing a self-regulating heating cable having a series architecture, the life expectancy of the cable is increased. Further, the start up current decreases compared with a similar parallel resistance self-regulating heating cable.

The cable may be a self-regulating cable.

The material may be a semi-conductor.

The material may comprise a polymer.

The material may comprise a high density polyethylene matrix including carbon.

The heating cable may further comprise at least one conductive terminal located at an end of the cable, and in electrical contact with the heating element via a conductive paste.

The conductive paste may comprise silver.

According to a second aspect, the present invention provides a heating device comprising a heating cable as described above.

The heating device may be a car seat heater.

According to a third aspect, the present invention provides a method of manufacturing a series resistance heating cable, the method comprising the step of providing a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.

According to a fourth aspect, the present invention provides a method of manufacturing a heating device, the method comprising providing a series resistance heating cable having a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a partially cut away perspective view of a known parallel resistance self-regulating heating cable;

Figure 2 is a partially cut away perspective view of a cable in accordance with an embodiment of the present invention;

Figure 3 is an end view of a terminal for connecting to the cable illustrated in Figure 2;

Figures 4A and 4B illustrate the terminal of Figure 3 being connected to the cable of Figure 2; and

Figure 5 is a schematic representation of a heating device in accordance with an embodiment of the present invention.

The present inventor has realised that a series resistance self-regulating heating cable combines the benefits of the parallel resistance self-regulating heating cables, but with less disadvantages.

Figure 2 illustrates a series resistance self-regulating heating cable in accordance with an embodiment of the present invention. The heating cable 20 comprises a heating element 22 extending longitudinally along the cable. The heating element 22 has a positive temperature coefficient, such that resistance of the element increases with temperature. Preferably, the element comprises a semi-conductive material shaped as a wire or string. One example of a suitable material is semi conductive high density polyethylene (HDPE), such as carbon loaded polyethylene. Typically, the element will have a substantially circular cross section, of diameter 2mm.

A primary insulation jacket or coating 24 surrounds the heating element 22, and is used to electrically insulate the element 22 from the surroundings. Typically, this primary insulation jacket 24 is formed of a polymer such as polyolefin, of approximate thickness 0.8mm.

A conductive outer braid 26 (e.g. copper braid typically of approximate thickness 0.5mm) can optionally be added for additional mechanical protection and/or use as an earth wire. Such a braid may also be covered by a thermo plastic outer jacket for additional mechanical protection, typically of approximate thickness 0.6 mm.

Although series resistance heating cables are known, such cables comprise a metallic heating resistance wire having a substantially constant electrical resistance. Such cables thus have a substantially constant power output, irrespective of the temperature of the heater. In high temperature environments, such series heaters continue to produce the designed heating load, which may result in over-heating or burn out of the heater unless externally controlled. This is a major disadvantage of known series resistance heaters.

However, by providing a heating element with a positive temperature coefficient, then when any portion of the heater is subjected to a high temperature, power output from the heater is reduced to prevent over-heating or burn out. Further, because the described embodiment is self-regulating, it may be arranged for connection directly to power supply terminals without the need to fix separate cold leads. This obviates the attendant material and labour costs, and removes the possibility of failure at a hot/cold joint. Preferably, the heating element is formed of polymeric and/or semi-conductive material. Such materials are particularly suitable for self-regulating heater cables, as they have a relatively large PTC. In other words, the resistance of the material changes significantly for a predetermined temperature range. For instance, the resistance may change by 50% over a 100°C temperature range. In polymeric materials, this change in resistance is typically due to the polymer expanding and at least partially breaking the conductive path between the two conductors.

In addition to the aforesaid advantages of the embodiment, which are typically shared by the parallel resistance self-regulating heating cable, other advantages also arise due to the series architecture.

Compared with a similar parallel-resistance self-regulating heating cable, a series resistance self-regulating heating cable experiences a lower inrush current on cold start up. This is because the inrush current is inversely proportional to the distance that separates the live and neutral terminals. In a parallel cable the two conductors are close together, typically 8mm apart. The applied mains voltage can easily 'jump' across the two buswires via the carbon loaded semi-conductor. Conversely, in the series architecture, the two terminals are some distance apart,

typically metres as opposed to millimetres, and hence inrush is inhibited. For example, a typical parallel-resistance self-regulating heating cable rated at 30 watts per metre might have a cold start resistance of approximately $300\ \Omega$, rising to a stable resistance of around $2\text{ k}\ \Omega$ after a predetermined time period. In other words, the resistance of the cable changes by at least an order of magnitude. In contrast, a similarly rated series resistance cable might have a cold start resistance of $1\text{--}1.5\ \Omega$, rising to a stable resistance of $2\text{ k}\ \Omega$. It will be appreciated that the resistance change of the series cable is lower than the resistance change of the similar parallel cable, with the series cable thus having a lower inrush current on cold start up. Consequently, over-current protection devices may therefore be sized closer to the operating current, thereby improving circuit safety, and decreasing the amount by which switch gear and components have to be over-sized. Additionally, series resistance self-regulating heating cables are less susceptible to failure than parallel resistance self-regulating heating cable. This is because in a series self-regulating heating cable, good electrical contact between the power conductors and the element need only be made at the two ends of the series cable, as opposed to a continuously good contact along the whole length of the parallel cable. Further, as the contacts with the conductors are made at the end of the cable, should repair or replacement of the contact prove necessary, this is readily accomplished.

Figure 3 shows an end view of a terminal 30 suitable for making an electrically conductive connection with an end of the heating cable. Preferably, a similar connection is made at each end of the cable. Figure 4A illustrates a cross sectional view of the terminal being applied to the heating element 22 located at one end of the cable 20, whilst Figure 4B illustrates the terminal *in situ*. The terminal is connected to a conductive lead (not shown), which is in turn connected to a power supply suitable for supplying power to operate the heater.

The terminal 30 comprises a body 32 defining an aperture. Legs 34 extend away from the body 32. Located at an end of each leg distant from the body 32 is a jaw 36. In use, the jaw 36 is arranged to dig into and grip a surface e.g. the jaw 36 is arranged to be imbedded within the surface of the heating element 22.

As can be seen in Figures 4A and 4B, the terminal 30 is located with the body 32 adjacent an end of the longitudinally extending heating element 22. The legs 34 extend along the sides of the heating element 22. A conductive paste (e.g. a silver paste) is injected through the aperture (in the direction shown by arrow 38) in the body 32, so as to fill the void between the end of the cable and the adjacent surface of the terminal body 32. Subsequently, the paste is set, ensuring a good electrical contact between the terminal and the heating element. Should electrical contact be lost, a new conductive paste coating may be readily applied.

Additionally, pressure is applied to the ends of the legs 34 distant from the body 32, so as to embed the jaws 36 within the element 22.

Such a series resistance self-regulating heating cable is suitable for use on a variety of heating devices and applications. It is particularly suitable for use in devices of known, predetermined length. This enables easier sizing of the heating device.

It has been appreciated by the present inventor that series resistance self-regulating heating cables comprising PTC materials are particularly suitable for use in heating devices or arrangements in which it is desirable to selectively heat a portion of the device in contact with an external body e.g. car seat heaters or motor cycle handle bar grip heaters. One example of such a material is carbon loaded polyethylene.

Figure 5 illustrates a plan view of a car seat heater arrangement, showing the layout of the series resistance self-regulating heating cable 20 within the car seat heater 40.

The overall width A of the heater 40 is approximately 600mm with a length B of approximately 900mm. Apart from the ends of the cable provided with a terminals 30 for connection to a power supply, the cable 20 is distributed so as to maintain a distance of at least C from the periphery of the heater. Typically, C is 100mm. The cable is arranged within the car seat heater so as to be substantially evenly distributed within the car seat, with typical cable spacing being D, a distance of approximately 100mm.

Such an arrangement tends to provide a total cable length of approximately 3000mm. For a 3 W/m rated cable, this typically results in a circuit resistance of approximately 16 ohms, whilst for a 7 W/m cable this would result in a circuit resistance of approximately 6.9 ohms.

In normal operation, the cable will emit heat, so as to warm the car seat. If a user contacts the surface overlying a portion of the cable, then this will result in an increase in temperature of that portion due to the rate of heat loss being decreased by the relatively warm body of the user. It will consequently be realised that, due to the element comprising a PTC material, the areas of the seat contacted by a user (eg. sat upon) will experience an increase in resistivity. This increase in resistivity will lower the overall heat output from the cable, as the total resistance of the cable will increase. However, for those areas in which the resistance increases, due to the serial nature of the cable, the heat emitted from those areas will be higher than the heat emitted from other, lower resistance areas where the users body mass is not present. The use of a series resistance cable with a PTC will thus provide a heater in which the majority of the heat is emitted from the area contacted by a user, whilst the PTC ensures this area is only maintained at a reasonable temperature that does not burn the user.

CLAIMS







1. A series resistance heating cable comprising a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.
2. A heating cable as claimed in claim 1, wherein said cable is a self-regulating cable.
3. A heating cable as claimed in claim 1 or claim 2, wherein said material is a semi-conductor.
4. A heating cable as claimed in any one of the above claims, wherein said material comprises a polymer.
5. A heating cable as claimed in any one of the above claims, wherein said material comprises a high density polyethylene matrix including carbon.
6. A heating cable as claimed in any one of the above claims, the cable further comprising at least one conductive terminal located at an end of the cable, and in electrical contact with the heating element via a conductive paste.
7. A heating cable as claimed in claim 6, wherein said conductive paste comprises silver.
8. A heating device comprising a heating cable as claimed in any one of the above claims.
9. A heating device as claimed in claim 8, wherein said device is a car seat heater.

10. A method of manufacturing a series resistance heating cable, the method comprising the step of providing a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.
11. A method of manufacturing a heating device, the method comprising providing a series resistance heating cable having a heating element extending longitudinally along the cable, the element comprising a material having a positive temperature coefficient.
12. A heating cable substantially as herein before described with reference to Figures 2 to 5 of the accompanying drawings.
13. A heating device substantially as herein before described with reference to Figures 2 to 5 of the accompanying drawings.
14. A method of manufacturing a heating cable substantially as herein before described with reference to Figures 2 to 5 of the accompanying drawings.
15. A method of manufacturing a heating device substantially as herein before described with reference to Figures 2 to 5 of the accompanying drawings.

ABSTRACT

SELF-REGULATING ELECTRICAL HEATING CABLE

A series resistance heating cable comprises a heating element extending longitudinally along the cable. The element comprises a material having a positive temperature coefficient.

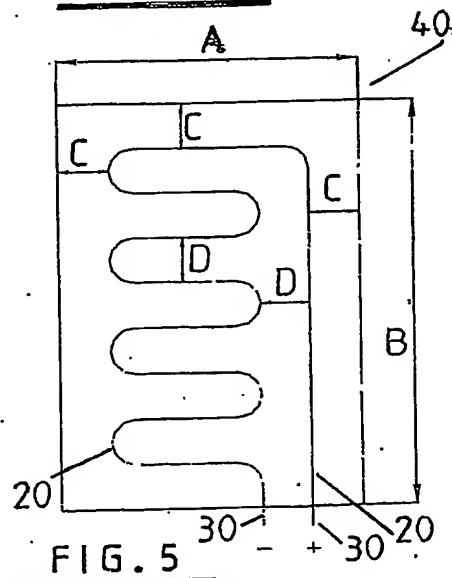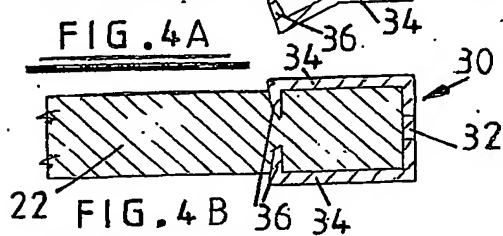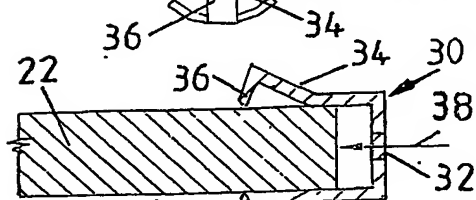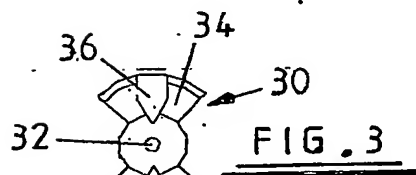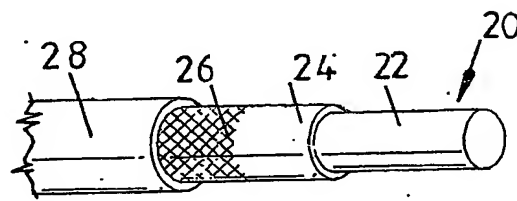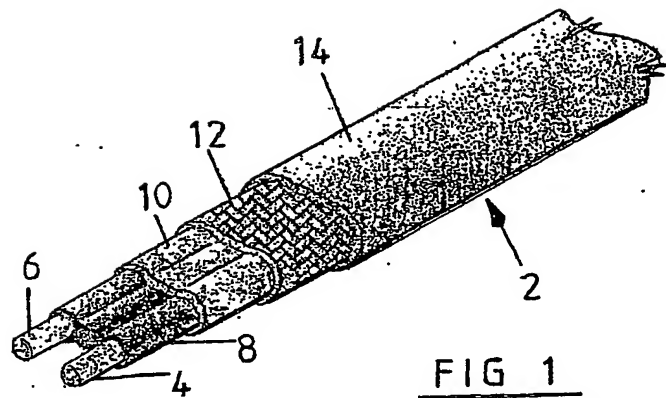

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.